



Protect your values.

PYRO-SAFE® DG-CR 1.5


Wraps

Description

Flexible and tear-resistant glass filament fabric composite building material with insulation layer forming coating on the inside.

Application areas

- Fire protection wraps for penetration sealing of media lines with flammable components (e.g. pipelines with flammable insulation).
- For indoor and outdoor use.

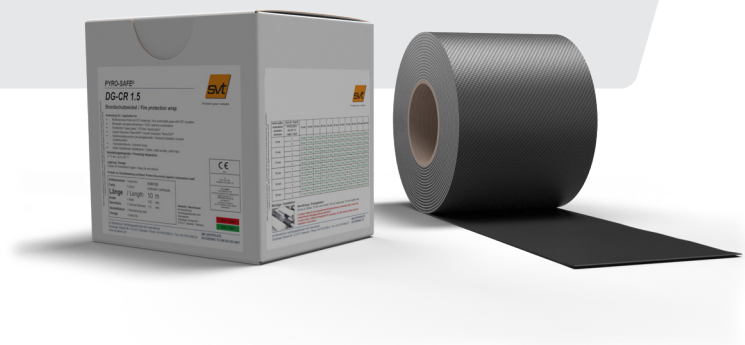

Delivery and packing

PYRO-SAFE® DG-CR 1.5	
Packing	Cardboard box
Width	125 mm
Length	10 m
Item number	
	01261125

Please contact us for further information:

✉ global@svt.de
☎ +49 4105-40 90-0

Orders: order@svt.de



Protect your values.

**PYRO-SAFE®
DG-CR 1.5**

Technical data

Shape	Coated on the inside with insulation layer forming fabric.
Coating	Grey outside, anthracite inside
Nominal thickness	1.5 mm
Weight per unit area	2,000 g/m ²
Reaction temperature	from approx. 150 °C
Interactions	No influence on other building materials like polyethylene (PE) and polyvinyl chloride (PVC) according to EOTA TR 024.
Application temperature	+ 5 °C – + 50 °C (< + 5 °C reduction of flexibility)
Application instructions	<ul style="list-style-type: none"> • Apply with standard cutting tools such as scissors or cutter knife. • Can be painted over with approved paints based on acrylic dispersion, alkyd resin, polyurethane acrylic and epoxy resin acc. to EOTA TR 024.
Storage	Dry indoors. Protect from pressure loads.
Safety information	Please note our safety data sheet.
Declaration of performance (DOP) no.	01261125-PYRO-SAFE® DG-CR 1.5






Protect your values.

PYRO-SAFE® DG-CR 1.5

Applications

Penetration seal

	Certification	System name	Fire resistance class
	ETA-16/0268	PYRO-SAFE® Novasit BM	max. EI 120
		PYRO-SAFE® Novasit BM 240	max. EI 240
		PYRO-SAFE® ES	max. EI 90
		PYRO-SAFE® Flammotect OSI	max. EI 120
		PYRO-SAFE® Flammotect single-layer	max. EI 90
		PYRO-SAFE® Flammotect double-layer	max. EI 120
		PYRO-SAFE® Flammotect quadruple-layer	max. EI 240
	Z-19.53-2329	PYRO-SAFE® Flammotect COMBI 90	Fire-resistant (90 min.)
	Z-19.53-2299	PYRO-SAFE® Sibralit ES	
	Z-19.15-1276	PYRO-SAFE® Universal penetration seal COMBI 90	
	C-AJ-2812, F-A-2278, F-A-5060, W-J-2325, W-J-5188, C-AJ-8274, F-A-8041, F-A-8042, F-A-8043, F-A-8044, F-A-8045, F-A-8046, W-J-8062, W-J-8063, W-J-8064, W-J-8065, W-J-8066, W-J-8067	PYRO-SAFE DG-CR 1.5	FT-Rating max. 3 hrs.
GOST DBN / DSTU	by request	Sealings for wall and ceiling penetrations for flammable pipes using PYRO-SAFE DG-CR	EI 150