







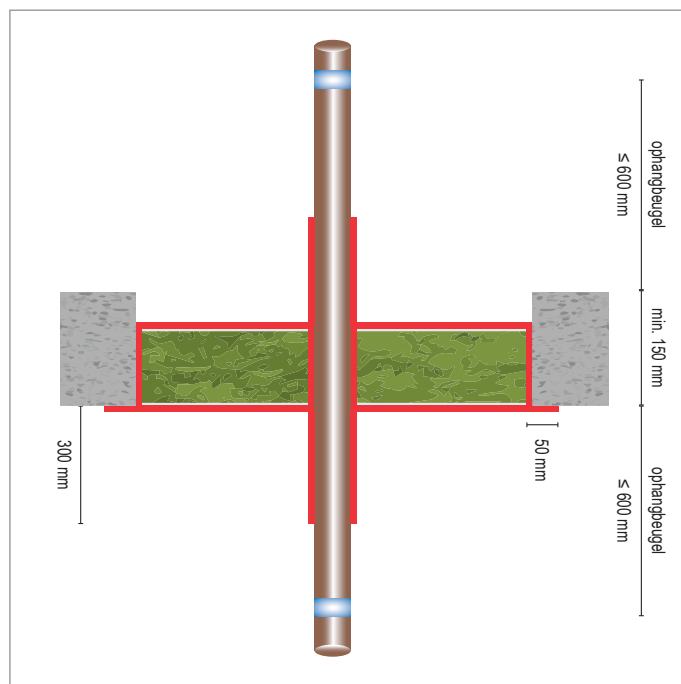

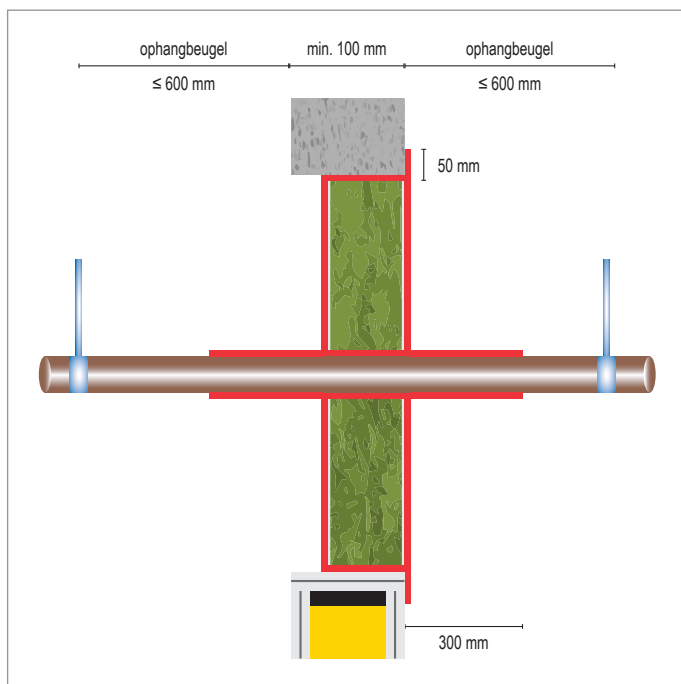


# FLAMRO® BS 60-2 MK Enkellaags Combischot

## Ablatieve coating



**RUIME SPARING  $\geq 40$  MM**

-  Niet-brandbare Metalen leiding
-  Lichte Scheidingswand
-  Massieve Wand / Massieve Vloer
-  FLAMRO® BS 60-2 Combischot
-  FLAMRO® BMA-BMS-BMK Coating

Doorvoer		Diameter (max)	Product	Lengte Coating	Brandweerstandsklasse		Goedkeurings document
					Wand	Vloer	
	Staalbuis	$\leq 42$	BMA 3-4 mm	$\geq 300$	EI = 60 U/C	EI = 60 U/C	Efectis R0706 Efectis R00996
	Koperbuis	$\leq 28$	BMA 3-4 mm	$\geq 300$	EI = 60 U/C	-	Efectis R0706
	Staalbuis	$\leq 169$	BMA 3-4 mm	$\geq 300$	EI = 30 U/C	-	Efectis R000731
	Koperbuis	$\leq 42$	BMA 3-4 mm	$\geq 300$	EI = 30 U/C	-	Efectis R000731

Deze handleiding dient als ondersteuning voor een juiste montage.  
Voor uitgebreide montagedetails, zie *Installation Manual*

Alle maten in mm

Bij afwijkende situaties raadpleeg onze technische support:

 +31 10 72 71 044

 [info@svt-products.nl](mailto:info@svt-products.nl)