





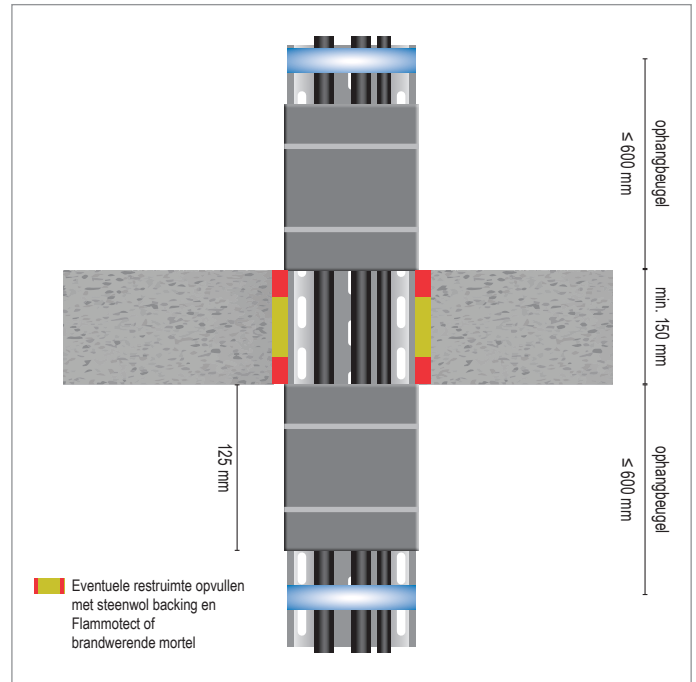

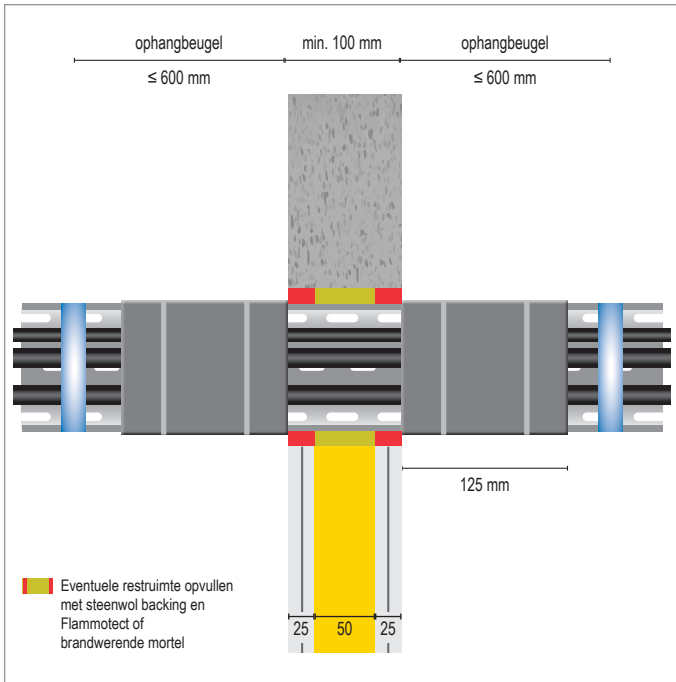

PYRO-SAFE® DG-CR 1.5

Firewrap



KLEINE SPARING < 40 MM

-  Kabelgoot / Kabels / Kabelbundel / Elektrabuis / Elektrabuisbundel
-  Lichte Scheidingswand
-  Massieve Wand / Massieve Vloer
-  PYRO-SAFE® DG-CR 1.5 Firewrap

Doorvoer	Diameter (max)	Product	Lengte Firewrap	Brandweerstandklasse		Goedkeurings document
				Wand	Vloer	
 Kabelgoot met kabels	geen limiet	Firewrap DG-CR 1.5	2 x 125	EI = 60	EI = 60	ETA 14/0418
 Kabels	≤ 80	Firewrap DG-CR 1.5	2 x 125	EI = 60	EI = 60	ETA 14/0418
 Kabelbundel	≤ 100	Firewrap DG-CR 1.5	2 x 125	EI = 60	EI = 60	ETA 14/0418
 Elektrabuis	≤ 32	Firewrap DG-CR 1.5	2 x 125	EI = 60	EI = 60	ETA 14/0418
 Elektrabuisbundel (3 stuks)	≤ 100 / ≤ 32	Firewrap DG-CR 1.5	2 x 125	EI = 60	EI = 60	ETA 14/0418

Deze handleiding dient als ondersteuning voor een juiste montage.
Voor uitgebreide montagedetails, zie *Installation Manual*

Alle maten in mm

Bij afwijkende situaties raadpleeg onze technische support:

 +31 10 72 71 044

 info@svt-products.nl